




### G-3 疊加式電控單向閥

#### Modular Solenoid Control Check Valves

## MSC

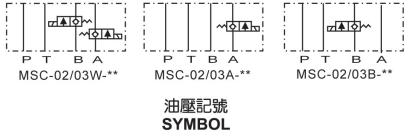

#### 選購指南 HOW TO ORDER

MSC	-02	A	-D24	-NC
系列編號 SERIES NUMBER MSC	通徑 VALVE SIZE 02 03	功能動作孔 ACTION PORT A:A孔 A PORT B:B孔 B PORT W:A.B孔 A.B PORT	線圈型式 COIL TYPE D12: 12VDC D24: 24VDC A15: AC110 / 50HZ A25: AC220 / 50HZ	控制方式 CONTROL TYPE NO: 常開卸荷 NORMAL OPEN TYPE NC: 常閉保壓 NORMAL CLOSE TYPE


#### 性能表 SPECIFICATION

型號 MODEL	額定壓力 RATED PRESSURE (kgf/cm <sup>2</sup> )	最大流量 MAX. FLOW (l/min)
MSC-02P-**-**	250	20
MSC-03P-**-**		45

### G-4 疊加型溢流閥

#### Modular Relief Valves

## MBP, MBA MBB, MBW

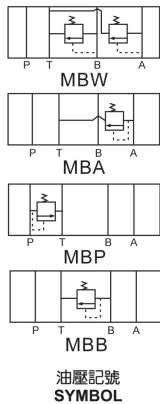

#### 選購指南 HOW TO ORDER

MB	P	-02	B	-
系列編號 SERIES NUMBER MB	功能動作孔 ACTION PORT P:P孔 P PORT A:A孔 A PORT B:B孔 B PORT W:A.B孔 A.B PORT	通徑 VALVE SIZE 01 02 03 06	壓力調整範圍 PRESSURE ADJ. RANGE kgf/cm <sup>2</sup> B: 7-70 C: 35-140 H: 70-220	調整把手型式 PRESSURE ADJ. KNOB TYPE H: 六角螺帽 H: HEX. NUT -: 塑料把手 (標準型) -: PLASTIC KNOB (SIZE 06 ONLY HAS H TYPE)

※ MB系列把手在B側 (右側)  
MB SERIES KNOB ON B SIDE (RIGHT SIDE).

#### 性能表 SPECIFICATION

型號 MODEL	最高使用壓力 MAX. OPERATING PRESSURE kgf/cm <sup>2</sup>	壓力調整範圍 PRESSURE ADJ. RANGE (kgf/cm <sup>2</sup> )	最大流量 MAX. FLOW (l/min)	重量 WEIGHT
MBP-01	250	B:7-70 C:35-140 H:70-220	01:2	1.2
MBA-01				
MBB-01			02:40	1.5
MBW-01				
MBP-02			03:80	1.5
MBA-02				
MBB-02		06:300	2.3	
MBW-02				
MBP-03		3.4		
MBA-03				
MBB-03		3.9		
MBW-03				
MBP-06	11.6			
MBA-06				
MBB-06				